

WASTES- Solids, Liquids AND GASES

A SYMPOSIUM PRESENTED
AT THE LAST TWOACHEMA
MEETINGS: 1967, 1970
FRANKFURT/MAIN, GERMANY

translated from the German by

MAX WULFINGHOFF, P.E.

1974
CHEMICAL PUBLISHING CO., INC.
NEW YORK, N.Y.

Wastes – Solids, Liquids and Gases

© 2011 by Chemical Publishing Co., Inc. All rights reserved. This book is protected by copyright. No part of it may be reproduced, stored in a retrieval system or transmitted in any form or by any means; electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the publisher.

ISBN: 978-0-8206-0243-1

Chemical Publishing Company:
www.chemical-publishing.com
www.chemicalpublishing.net

First edition:

© **Chemical Publishing Company, Inc.** – New York, 1974

Second Impression:

Chemical Publishing Company, Inc. - 2011

Printed in the United States of America

Contents

Preface	
W. Teske—Clean Water in the Chemical Industries	1
F. Benze—On the Shear Strength of Floccs	11
H. Thikoetter—Aeration in Effluent Treatment	21
R. Koehler—Biological Problems in the Handling of Organic Pollution in Industrial Effluents	29
W. Christ—Updraft Impellers in Activated Sludge Processes	45
H. Roenneke—Purification of Oil-bearing Effluents by Gas Flotation	57
G. Bernecker—The Treatment of Fluid Industrial Wastes by Combustion	67
L. Agneray, M. Bruni, G. Vandebussche, A. Clayer—Recovery of Nitrogen Oxides from Industrial Emissions by Means of Counter-current Adsorption	75
E. Hollax, K. Schwabe, K. Wiesener—Removal of Industrial Emissions by Electrochemical Means, Using a Novel Double-Layer Electrode	81
H. W. Braeuer, F. Fischer—Simultaneous Recovery of Carbon Disulfide and Removal of Hydrogen Sulfide Purity Requirements for Viscose Plant Emissions	99
O. Merz—Practical Testing of Dryer Exhausts in Surface Coating Operations	109
C. Junge—On the Size Distribution of Aerosols In the Atmosphere	113
R. Kratel—Developments in Clean Room Techniques	121
E. Kanz—Bacteriological Contamination and Decontamination	129
J. Guichard—Elutriation in the Production of Aerosols	135
J. Bricard, F. Billard, G. Madelaine—New Knowledge of Ultrafine Aerosols	151
C. Allander, E. Abel—A Novel Ventilation System for Operating Rooms	159
E. Mueller—Applications of Clean Rooms in Manufacturing	167

E. Martens, K. Fuss—Supervision of Clean Rooms by the 40-1 Particle Counter	173
A. Delyannis—Potable Water from Sea and Brackish Waters State-of-the-Art Report	185
R. Braun—Problems in the Removal of Inorganic Industrial Slurries	197
R. Quack—Problems in the Operation of Electrostatic Filters	207
H. Brand—Catalytic and Thermic Combustion of Industrial Waste Gases	223
H. Kral—Novel Honeycomb Type Catalyzers for Gas Purification	229
K. Storp—Desulfurization of Waste Gases by Adsorption and Catalysis on Activated Carbon	237
D. Kraeft—Control of Air Pollution by Vehicular Exhaust Testing Methods and Expectable Results	249
F. Maier—Removal of SO ₂ from Waste Gases	261
G. Vaillant—Pollution in Industry	269
R. Born—Decontamination of Effluents by Percolating Filters With Plastic Packing	283
H. Bucher—Continuous Ion Exchange in a Novel Counterflow Process	289
S. Vajna—Intensive Fractionation—A Novel Approach in Ion Exchange Technology	301
R. Rennhack—Novel Developments in the Regeneration of Acid Pickling Liquors and Other Chloride Bearing Solutions	311
J. Vostřcil, I. Tesarik—Water Purification in Sludge Blanket Clarifiers. The Influence of the Suspension Load.	321
K. Roennefahrt—Making Potable Water from Surface Waters	333
G. Krause—Supervision and Control of Large Biological Clarifiers for Industry Effluents.	343
R. Leschber, H. Klickermann—Automatic Sampling of Domestic Effluents	353
H. Goebgen—Atomic Absorption Spectrophotometry in the Investigation of Waste and Interceptor Waters	359
R. Rasch—Disposal of Industrial Wastes	371
J. Clark, D. Othmer—Industrial and Domestic Sewage—A Total Treatment with Fly Ash and Polyelectrolytes	385
G. Lindner—A Chemist's View of Garbage Disposal Methods	393
W. Pietrulla—A Novel Method for Continuous Determination of Chlorine Ions in Liquids and Chlorinated Hydrocarbons in Air	409
R. Madsen—Reverse Osmosis and Ultrafiltration	417
M. Wulfinghoff—Where Do We Stand Today?	425
Index	431

Preface

For the last half century, at three-year intervals, the European Federation of Chemical Engineers has presented international exhibits displaying the latest state of the art, at Frankfurt, Germany. These recurrent events are generally coincident with lectures and discussions by technical experts.

Also, special committees have been formed on subjects of particular significance; thus since 1964 there has been a group dedicated to the preservation and protection of the environment.

The 1967 convention produced, among others, some new insights into the field of suspensions and aerosols. Five of the twenty-four lectures were presented in English.

At the 1970 convention, the opening paper was read by a noted American authority on the aspects of water supplies and their maintenance, in English. Two other contributions were likewise in English.

The bulk of the material, mostly case histories, was presented in the German language. In view of its wide interest, a translation is submitted herewith. The permission granted by Dr. D. Behrens, Managing Director of Dechema, is gratefully acknowledged.

June, 1972
Tampa, Florida

Max F. Wulfinghoff

Clean Water in the Chemical Industries

W. Teske, Ph.D., Hoechst, Germany

In view of recent legislation, some significant figures will be quoted for West German conditions, as of 1966. Main users were:

	billion cu. meters
The chemical industries	2.756
Coal mining	2.733
Iron and steel	1.267
Paper and pulp	0.816
Oil refining	0.432
Minerals	0.302
Automotive and aircraft	0.239
Textiles	0.254

The total water supply in West Germany in 1963 was 13.34 billion cubic meters, of which households took 2.61 billion and industry 10.73 billion or 80 pct. Of the latter, chemical industry took 25.6 pct of which 80 to 85 pct was cooling water, and balance production use. The waste water produced by all industry amounted to 9.78 billion cubic meters, of which 2.65 billion or 27 pct was due to the chemical industries. Of this, 2.09 billion was cooling and hence unpolluted water or 79 pct. 0.462 billion cubic meters or 17.4 pct, were loaded with chemicals, and discharged into rivers or sewer systems. Again, 0.362 billion of these were treated to some extent (11.5 pct) and 0.157 billion remained untreated (5.9 pct).

In order to prevent any lasting damage to the physical, chemical or biological characteristics of waters, extensive legislation has intervened since 1965. The principles and technology of

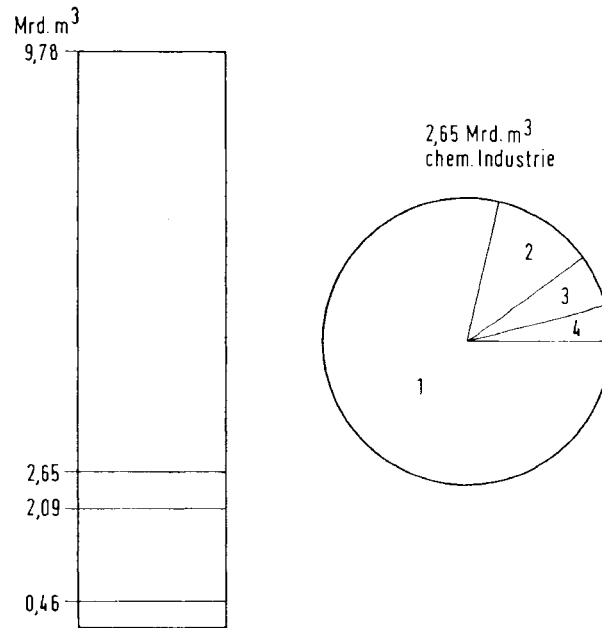


Fig. 1 At left, total of industrial waste waters, $9.78 \times 10^9 \text{ m}^3$, of which 2.65×10^9 is due to chemical industries comprising $2.09 \times 10^9 \text{ m}^3$ cooling water and $0.46 \times 10^9 \text{ m}^3$ of polluted material. At right, individual components by percentages: 1 = coolant (78.8), 2 = partially treated (11.5), 3 = non-pretreated (5.9), balance unused waters (3.8).

such treatment have been discussed in a prior publication, as settling, separation, filters, steam and air stripping, biological percolation, accelerators and sludge tanks. Also, aeration ponds are in use; Fig. 2 shows an installation situated at Geleen, Holland, and belonging to the Staatsmijnen operation. In principle, such plant-owned clarification equipment could be circumvented through direct introduction of waste waters into natural or artificial subterranean cavities, provided that ground water supplies are not interfered with.

In Germany, such opportunities are rare, as abandoned salt mines may not be utilized in view of possible damage. In Midland, Michigan, the Dow Chemical Co. is said to dispose of one-third of its effluents demanding 60 tons per day of chemical oxygen by means of subterranean deposition.

By another method, waste waters that are impractical to recondition are disposed at sea. This is practiced by some German firms in the case of iron-bearing sulfuric effluents from titanium



Fig. 2 Oxidation ponds

white production, of gypsum-bearing sludges, of concentrated salt solutions, and of toxic wastes the biological treatment of which would be overexpensive. The matter is under study by a special committee. Whether chemical companies should provide water treatment facilities of their own, or join forces with a publicly owned installation will depend on circumstances such as the need to provide canals, holdover ponds, pretreatment plants or the like. On the other hand, the privately owned plant will be less dependent on overall changes in the local industry, or variations in water purity and composition, etc. In any event, changes or improvements in the manufacturing process itself offer possibilities. Thus, for a large petrochemical plant the BOD_5 content of the waste waters was reduced by 6 tons per day through a stripping process. Vast amounts of hydrochloric acid had become unsaleable; they resulted from the chlorination of hydrocarbons. In 1965 an electrolytic department was added that produces 100 tons per day of commercial chlorine from these effluents.

Other operations leave bisulfite-bearing effluents that consume oxygen and are presently reworked to yield commercial sulfur dioxide. Surplus phenol is recovered in another department. Ethylene oxide production by the chlorhydrine process had supplied some 100,000 to 250,000 tons of calcium chloride solution that now undergo direct oxidation.

In the production of perlon, caprolactam had been made through a conversion of sodium nitrite, sodium sulfite and sulfur dioxide in an aqueous solution, and 3000 tons of sodium

sulfate per month had to be emptied into a rivercourse. The process was modified into a catalytic conversion of nitrogen monoxide, hydrogen and concentrated sulfuric acid. The by-product is ammonium sulfate which is a fertilizer; there is no effluent.

In rubber manufacture, thiazol is used which had been precipitated from the reaction by means of sulfuric acid, yielding watery byproducts. The latter are presently oxidized by air, giving solid thiazol instead of 4,000 tons monthly of organic effluent.

Some dyes are produced in a water solution and precipitated by means of common or of Glauber's salt. The aqueous effluent was dumped into the sewer system. Presently, by means of spray drying the dyes obtained are in powder form, and no waste water is produced.

The reduction of organic compounds was commonly achieved by means of iron, and the remaining ferrous sludges and salts created a problem. Meantime, the iron could be replaced by hydrazin hydrate that leaves no residues, or by pressurized hydrogen.

Finally, water cooling systems have largely been replaced by recirculation via towers, or by air cooling, all of which has reduced the load on water disposal systems.

Centralization of Waste Treatment Installations

In areas where chemical industries are concentrated, a variety of effluents may become available, and the question arises as to the advisability of a common treatment facility. Questions that will have to be asked comprise:

1. Can the effluent be decomposed by biological means?
2. What is the biological and the chemical oxygen demand?
3. How much sludge can be expected to accumulate in the treating chamber?
4. What is the sludge/recycle ratio?
5. Quantity of excess sludge?
6. Overall oxygen demand?
7. Oxygen resorption; demand of air?
8. Nutrient requirements?
9. Expected degree of decomposition?
10. Shape of pond if available?
11. Rate of recirculation?

12. Energy requirements?
13. Times of aeration? (Holdover time)
14. Pre-clarification time?
15. Post-clarification time?

In this connection, a direct extrapolation of laboratory results would be inadvisable in view of the considerable first cost and operating expense of such a facility; use of a pilot or semi-works plant is recommended; note Fig. 3.

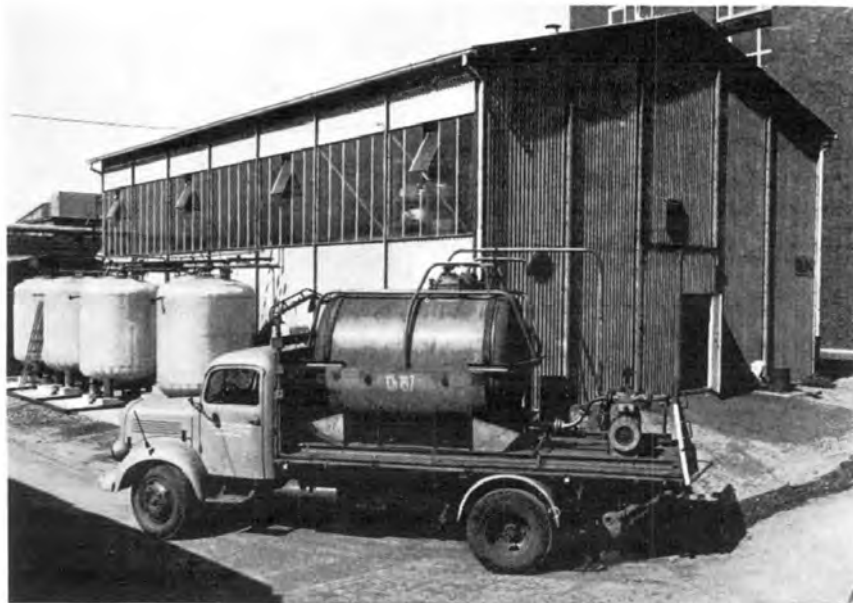


Fig. 3 Mobile test equipment, Hoechst AG

In the typical case, the planning requires a large number of individual answers from chemists, biologists, process engineers and constructors, aided by electronic data processing. In most cases, better separation of cooling water streams from contaminated waters will be indicated. The environmental relationships merit particular attention, especially so since water treatment plants are unproductive users of space. For instance, some concerns that have such facilities under construction include E. Merck of Darmstadt, Boehringer of Ingelheim, Erdoelchemie of Dormagen, Huels, Schering, Hoechst, Bayer of Leverkusen, BASF of Ludwigshafen, and others. Bayer and BASF have

joined forces with a neighboring community; Fig. 4 is a scale model. Here, two rivers and several highways had to be re-routed. 1a is the community's pretreatment plant featuring a mechanical filter, sand filter, and presettler. 1b is the industrial pretreatment and biological stage. At 4 a holdover tank for acid effluents is provided, including a neutralizer. At 2 solid and sludges are deposited, and at 3 an incinerator is planned. The capacity is 65000 cubic meters daily; the first stage opened in 1968 handles 34,000 cubic meters per day. Furthermore, the facility will deal with the effluents of five corporations, and ultimately have 135,000 m³/day capacity. The total biological oxygen demand for 5 days will be of the order of 100 tons per day for 36 hours holdover time.



Fig. 4 Scale model of Bayer plant

Likewise, BASF expects to treat its plant effluents together with the city wastes of Ludwigshafen. The industry will supply 250,000 to 300,000 cubic meters daily with an oxygen load of 170 to 200 tons per day. Here, the plant effluent carries nitrates and nitrites that cannot be degraded adequately by biological means in the usual manner. A two-stage decomposition is required that consists of one denitrification tank where the bacteria remove their oxygen demand by degrading the nitrates and nitrites, and one standard aeration tank. The excess sludge will

be composted after mechanical dehydration. To collect the effluents, a second waterway of 25 km total length must be provided.

Fig. 5 is a view of the Huels facility. Per day 72,000 cubic meters of plant effluent must be treated biologically. After a mechanical pretreatment, the waste water is forwarded to the large pond. First it is sprayed to remove the volatiles and pick up the oxygen needed for the following biological stage. Further aeration takes place in the pond itself.



Fig. 5 Plant of Chemische Werke Huelst

The installation of Merck is a closed one as it includes the mechanical and biological purification, and incineration of the excess sludge. It handles 24,000 cubic meters of effluent daily with a biological oxygen demand of 28 tons. The waste waters first pass a sand trap and screen and a neutralizing station followed by an aerated sand zone, and flocculating and settling space. The remaining sludge is deposited on drying beds. The waste then enters three holding and storage tanks of a total of 42,000 m³ where it is homogenized by repeated recycling. Like in the Huels case, it is made to form an air curtain. The treatment is by three accelerators of the aerating type, each 30.5 m in diameter and 6.6 m deep, followed by a thickener and sludge storage.

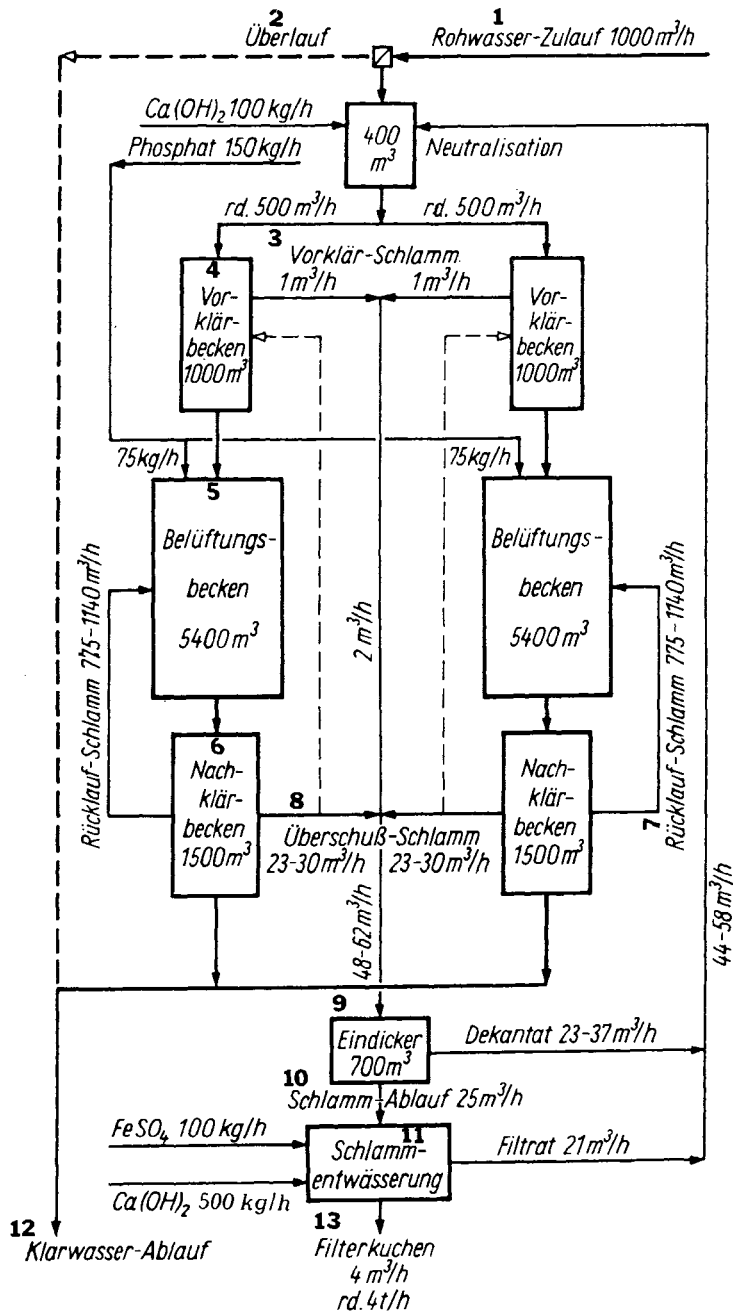


Fig. 6 Flowsheet of Hoechst plant-1. Raw water in, 2. Overflow, 3. Pretreated sludge, 4. Pretreating tank, 5. Aeration tank, 6. Postclarification tank, 7. Recycled sludge, 8. Excess sludge, 9. Thickener, 10. Sludge exit, 11. Sludge dewatering, 12. Clear water runoff, 13. Filter cake.

The biological treatment takes 4 hrs. and is 95 percent effective. The excess sludge is filtered after pre-thickening and addition of ashes, iron sulfate and lime to give a firm product which passes to the incinerator. The kiln is oil fired and has five stages through which the sludge passes downward and is eventually ignited at 800°C. and incinerated.

At Hoechst, 100,000 m³ of effluent per day are treated in four stages, with a biological oxygen demand of 120 tons. Fig. 6 presents the first stage for 24,000 m³/day. The effluents are loaded with organic petrochemicals and are first neutralized with lime. The resulting solids are separated in two tanks, and forwarded to two activated sludge ponds, after pre-clarification. Aeration is by 16 Vortair surface ventilators, the residence time is 10.5 hours. Post-clarification takes place in two ponds. Filtration is by two filters; lime and iron sulfate are added and the sludge is deposited temporarily, Fig. 7. Later it will be incinerated. Space limitations require operation at a relatively high oxygen demand level of 1200 mg-per liter. The decomposition is 95 pct complete. The phosphorus and nitrogen demand of the bacteria could not be supplied from domestic sewage, so fertilizer out of the current production must be added.

To sum up, since all antipollution work is expensive, it must ultimately be paid out of current revenue. Therefore the ques-



Fig. 7 Biological treatment at Hoechst

tion cannot be what is feasible, exhausting all possibilities; rather, one has to consider how much one can afford to buy in the way of antipollution equipment in view of the need to maintain one's ability to compete in the domestic and possibly the world markets.

On the Shear Strength of Floccs

Friedrich Benze, D. Ing., Aachen, Germany

In recently developed water purification schemes, a separation of solids from liquids by means of centrifugals is encountered frequently. In that connection the effect of the transverse motion upon the flake size, the mechanical strength of the floc and the floc volume are of special interest.

The coagulation of particles in suspension is controlled by the interaction of repulsion and attraction potentials. The attraction of particles is due to Van der Waal's attractions that are far-reaching cohesive forces. The repulse potential is due to the boundary layer potential in the electrical double layer at the solid-liquid interface, and it may be found from electrophoresis tests.

When coagulating the particles must overcome the potential threshold. The energy of interaction that slows down or impedes coagulation can be reduced by adding an electrolyte that lowers the boundary face potential. Another way is offered by an increase of the kinetic energy of particles by drawing energy from the viscous flow or by temperature increase. Along with such energetic considerations the geometry of flocculation must be considered. The Brownian molecular motion offers the particles an opportunity to contact each other and thus coagulate. Stirring the suspension will improve the resulting probability.

Smoluchowsky was the first to calculate the probability of impact due to the Brownian motion as well as velocity in a laminar shear field; note tabulation in Fig. 1

The speed of coagulation due to Brownian motion depends only upon the temperature and the viscosity. The coagulation

 Probabilities of impact (from Smoluchowski).

$$\text{Brownian molecular motion} \quad b_B = \frac{8}{3} \frac{kT}{\eta} n_1 n_2$$

$$\begin{aligned} \text{Motion under shear} \quad b_G &= \frac{4}{3} G (r_1 + r_2)^3 n_1 n_2 \\ &= \frac{4}{3} G R^3 n_1 n_2 \end{aligned}$$

Ratio of probabilities of impact:

$$J = \frac{b_G}{b_B} = \frac{\eta R^3 G}{2 k T}$$

Diameter of particle (μm)	$J = \frac{b_G}{b_B}$		
	$G = 1 \text{ sec}^{-1}$	$G = 10 \text{ sec}^{-1}$	$G = 100 \text{ sec}^{-1}$
0.1	10^{-4}	10^{-3}	10^{-2}
1	10^{-1}	1	10^1
10	10^2	10^3	10^4

($\eta = 1 \cdot 10^{-2}$ Poise, $k = 1,38 \cdot 10^{-16}$ erg/Grad, $T = 300^\circ\text{K}$)

Fig. 1

due to the velocity gradient is proportional to the shear gradient G and the particle size. The probability of collision for the particles and hence the decrease in time of the free suspended particles is an additive resultant of the chance of collision due to Brownian motion and the laminar shear.

It can be shown that for small particles the chance of collision is mostly due to Brownian motion and agitation has no effect on flocculation. For large particles the effect is the reverse. The ratio of these probabilities:

$$J = \frac{b_G}{b_B} = \frac{\eta G R^3}{2 k T}$$

Index

- Activated carbon 102, 237, 335
- Activated sludge 45
- Adsorption 237
- Aeration 21
- Aerosols 113, 135, 148, 151
- Agarflex 129
- Agitators 22
- Airborne germs 132
- Air bubbles 47
- Air flow 159
- Amperometry 341
- Asahi process 294

- Bacteria 129
- Biological factors 29
- BOD 284
- Brackish water 187
- Brownian motion 11

- California exhaust law 251
- Camp number 327
- Caprolactam 3
- Carbon disulfide 99
- Catalytic combustion 223
- CCS process 290
- Centralization of plants 4
- Chlorine ions 409
- Clarifiers 343
- Clean rooms 121, 167, 173
- Colloids 36
- Combustion 67
- Compressed air 23
- Condensation nuclei 151
- Conveyors 144
- Corona discharge 211

- Degremont process 295
- Desalination 185, 298
- Desulfurization 99, 237
- Drip separator 89
- Dryer exhaust 109
- Dumping at sea 3
- Dust control 167

- ECE Rules 257
- Electric wind 212
- Electrochemical methods 81
- Electrodes 85
- Electrostatic filters 207
- Elutriation 135
- Epoxy resins 43

- Flocculation 11
- Fluicon process 293
- Fluidization 135
- Fluid wastes 72
- Fly ash 385
- Freezing 194

- Garbage disposal 393
- Gas flotation 57
- Gas washers 275
- Gasification 383
- Geleen plant 2
- Giammarco-Vetrocoke 101
- Gorator 381
- Gyrex aerator 25

- Higgins process 289
- Hospitalism 129
- Hydrogen sulfide 99

- Impellers 27, 45
- Inclined percolators 286
- Industrial percolators 286
- Industrial pollution 269
- Inorganic sludges 197
- Intensive fractionation 301
- Ion exchange 289

- Kito screens 69

- Legislation on pollution 1
- Lurgi system 313

- Metallic sludges 203
- Multilayer electrodes 85
- Multrum installation 395

- Nitrogen oxides 73

- Odors 110
- OSW 185

- Packing types 284
- Particle counters 173
- Passenger car exhaust 257
- Percolators 40, 283, 286
- Perlon production 3
- Permutit process 292
- Petrification 203
- Phenolic effluents 34
- Photometer 148
- Pickling liquor 311
- Plastic packing 283
- Plating sludges 201

- Polytest tube 110
- Potable water 185
- Puldoulite 145
- Pulverotron 135
- Purac method 397

- Qualitest tube 110

- Reverse osmosis 417

- Saline water 185
- Sampling 253
- Sapromet 22
- Silica gel 75
- Sintering 201
- Spectrometer 115
- Spectrophotometry 359
- Stack gases 70
- Stagewise treatment 8
- Sulfosorbon 241
- Sulfur 100, 237
- Sulfreen 244

- Thermic regeneration 263
- Thiazol 4
- Treatment centers 4
- TTC method 32
- Turbulent furnace 71

- Van der Waals forces 11
- Vehicle exhaust 249
- Ventilation 159
- Viscose 99

- Waste gases 261

